



### Description and Area of Application

The PC® Silicone Strip is a high temperature silicone molded strip used to fill the spacer air gap between the pipe and the bore of the insulation section to create water stops at supports, protrusions and terminations in the FOAMGLAS® Insulation Spacer System.

### Field Application

Always read and understand information contained within product datasheets and safety datasheets before attempting to use this product. If you have questions regarding fitness of use of this product for an application, consult Owens Corning.



### Substrate Preparation

FOAMGLAS® insulation surface should be dry and free of dust, loose scale, oil, grease and frost.

### Cellular Glass Application Guidelines

PC® Silicone Strip is typically applied approximately 6mm (¼ in.) from the edge of the insulation segment at insulation terminations, water stops, and sectional isolations.

### Clean Up and Disposal

Dispose of excess material in accordance with local, state and federal regulations.


### Type of Delivery and Storage

- One roll is equivalent to 5 m (16.4 ft.) of silicone strip
- Consult Safe Use Instruction Sheet for additional storage and handling information.

### Typical Properties

PROPERTY	METHOD	SI	ENGLISH
Composition		Silicone	
Color		Rusty Red	
Density		1.12 +/- 0.05 kg/L	69.9 ± 3.1 lb/ft³
Service Temperature			
Maximum, Intermittent		250°C	482°F
Maximum, Continuous		200°C	392°F
Minimum		-50°C	-58°F
Tensile Strength	ASTM D412	7.5 MPa	1088 psi
Elongation at Break	ASTM D412	350%	
Durometer Hardness	ASTM D661 (Shore A)	40 ± 5	
Linear Shrinkage Rate		3.6 to 4.0%	

### Dimensions

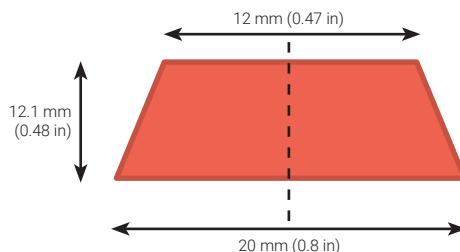

The information contained herein is accurate and reliable to the best of our knowledge. But, because Pittsburgh Corning LLC has no control over installation workmanship, accessory materials or conditions of application, NO EXPRESSED OR IMPLIED WARRANTY OF ANY KIND, INCLUDING THOSE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS MADE as to the performance of an installation containing Pittsburgh Corning LLC products. In no event shall Pittsburgh Corning LLC be liable for any damages arising because of product failure, whether incidental, special, consequential or punitive, regardless of the theory of liability upon which any such damages are claimed. Pittsburgh Corning LLC provides written warranties for many of its products, and such warranties take precedence over the statements contained herein.



**Pittsburgh Corning LLC**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659

For web-based Sales and Technical  
Service inquiries, please visit  
[www.foamglas.com](http://www.foamglas.com)

To contact by phone or email:

**Industrial & Commercial Sales  
Americas**  
+1 800-327-6126

**Asia-Pacific**  
Singapore: + 65 9635-9184  
China: +86 (0) 21 6101 7179  
Japan: +81 3 6365 4307

**Europe, Middle East & Africa**  
+32 13-661-721

**Technical Services  
Americas & Asia Pacific**  
+1 800-327-6126  
[foamglastechnical@owenscorning.com](mailto:foamglastechnical@owenscorning.com)

**Europe, Middle East & Africa**  
+32 13-611-468  
[Industrytechnical@foamglas.com](mailto:Industrytechnical@foamglas.com)