




FOAMGLAS® READY TAPERED F

Page: 1

Date: 01.01.2019

Supersedes: 00.00.0000

www.foamglas.com

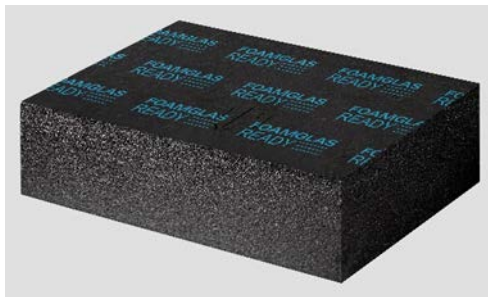

FOAMGLAS® READY TAPERED F consists of FOAMGLAS® READY F slabs which are tapered across their width, or sometimes their length. A central arrow stamped onto the top surface indicates the direction of fall. The upper surface is covered with a bitumen coating. It allows for direct torch-on of waterproofing sheets.

Form of delivery

length x width [mm]	600 x 450						
average thickness [mm]	60	70	80	90	100	110	120

length x width [mm]	600 x 450						
average thickness [mm]	130	140	150	160	170	180	

Standard angles of inclination:

1.1%, 1.3%, 1.7%, 2.0%, 2.8%, 3.0%, 3.3%, 4.0%, 4.4%, 5.0%, 5.6%, 6.7%.

Other dimensions and thicknesses are available on request.

General FOAMGLAS® Cellular Glass Insulation characteristics

- Description : FOAMGLAS® Insulation is manufactured from specially graded recycled glass (≥ 60%) and natural raw materials which are available in abundant supply (sand, dolomite, lime...). The insulation is totally inorganic, contains no ozone depleting propellants, flame resistant additives or binders. Without VOC or other volatile substances.
- Reaction to fire (EN 13501-1) : Material complying with Euroclass A1, non-combustible, no toxic fumes
- Service temperature limits : from -265°C to +430°C
- Water vapour resistance (EN ISO 10456) : $\mu = \infty$
- Hygroscopicity : zero
- Capillarity : zero
- Melting point (cf DIN 4102-17) : >1000 °C
- Thermal expansion coefficient (EN 13471) : $9 \times 10^{-6} \text{ K}^{-1}$
- Specific heat (EN ISO 10456) : 1000 J/(kg·K)

FOAMGLAS® characteristics

Time-tested thermal performance	Waterproof	Resistant to attack	High compressive strength	Acid resistant / chemical resistant
Non-combustible	Impervious to water vapour	Dimensionally stable	Ecological	Radon protection



FOAMGLAS® READY TAPERED F

Page: 2

Date: 01.01.2019

Supersedes: 00.00.0000

www.foamglas.com

1. Product characteristics according to EN 13167 ¹⁾

Density ($\pm 10\%$) (EN 1602)	: 165 kg/m ³
Thickness, average (EN 823) ± 2 mm	: from 60 to 180 mm
Length (EN 822) ± 2 mm	: 600 mm
Width (EN 822) ± 2 mm	: 450 mm
Thermal conductivity (EN ISO 10456)	: $\lambda_D \leq 0.050$ W/(m·K)
Reaction to fire (EN 13501-1)	: Euroclass E (Core material Euroclass A1)
Point load (EN 12430)	: PL ≤ 1.0 mm
Compressive strength (EN 826 annexe A)	: CS ≥ 1600 kPa
Bending strength (EN 12089)	: BS ≥ 550 kPa
Tensile strength (EN 1607)	: TR ≥ 200 kPa

1) CE-marking ensures conformity with the mandatory essential requirements of CPD as mentioned in EN 13167; within the CEN Keymark certification all mentioned characteristics are certified by an empowered, notified and accredited 3rd party.

2. Additional product data

Thermal diffusivity at 0°C	: 3.5×10^{-7} m ² /sec
λ_D -value and mean t° range (EN ISO 13787)	: + 35 °C ≤ 0.054 W/(m/K)
Product Conformity BS EN 13167 : 2001	: Nr. CL 07020029
BRE Green Guide Rating	: A
NBS plus	: yes
RIBA - CPD Assessed Material	: yes

3. Applications

READY BLOCK TAPERED ROOF SYSTEM, cut-to-falls insulation system:

- flat roofs (cold bonding on concrete using PC® 500)
- metal and special roofs
- belowgrade floors and walls
- interior insulation for floors

Insulation system allowing for direct torch-on of waterproofing sheets.