




FOAMGLAS® READY TAPERED T3+

Page: 1 Date: 01.08.2021 Supersedes: 01.03.2020 www.foamglas.com

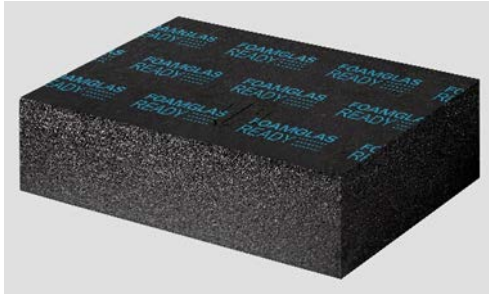

FOAMGLAS® READY TAPERED T3+ consists of FOAMGLAS® T3+ slabs which are tapered across their width, or sometimes their length. A central arrow stamped onto the top surface indicates the direction of fall. The upper surface is coated with a bitumen layer and covered with a PE foil. This allows direct torch-on of waterproofing sheets.

Form of delivery

length x width [mm]	600 x 450							
average thickness [mm]	60	70	80	90	100	110	120	130

length x width [mm]	600 x 450						
average thickness [mm]	140	150	160	170	180	190	200

Standard angles of inclination:
 1.1%, 1.3%, 1.7%, 2.0%, 2.8%, 3.0%, 3.3%, 4.0%, 4.4%, 5.0%, 5.6%, 6.7%.
 Other dimensions and thicknesses are available on request.

General FOAMGLAS® Cellular Glass Insulation characteristics

- Description : FOAMGLAS® Insulation is manufactured from specially graded recycled glass and natural raw materials which are available in abundant supply (sand, dolomite, lime...). The insulation is totally inorganic, contains no ozone depleting propellants, flame resistant additives or binders. Without VOC or other volatile substances.
- Reaction to fire (EN 13501-1) : Material complying with Euroclass A1, non-combustible, no toxic fumes
- Service temperature limits : from -265°C to +430°C
- Water vapour resistance (EN ISO 10456) : $\mu = \infty$
- Hygroscopicity : zero
- Capillarity : zero
- Melting point (cf DIN 4102-17) : >1000 °C
- Thermal expansion coefficient (EN 13471) : $9 \times 10^{-6} \text{ K}^{-1}$
- Specific heat (EN ISO 10456) : 1000 J/(kg·K)
- FOAMGLAS® characteristics :



Time-tested thermal performance



Waterproof



Resistant to attack



High compressive strength



Acid resistant / chemical resistant



Non-combustible



Impervious to water vapour



Dimensionally stable



Ecological



Radon protection



FOAMGLAS® READY TAPERED T3+

Page: 2

Date: 01.08.2021

Supersedes: 01.03.2020

www.foamglas.com

1. Product characteristics according to EN 13167 ¹⁾

Density (± 15%) (EN 1602)	: 100 kg/m ³
Thickness, average (EN 823) ± 2 mm	: from 60 to 200 mm
Length (EN 822) ± 2 mm	: 600 mm
Width (EN 822) ± 2 mm	: 450 mm
Thermal conductivity (EN ISO 10456)	: $\lambda_D \leq 0,036 \text{ W/(m}\cdot\text{K)}$
Reaction to fire (EN 13501-1)	: Euroclass E (Core material Euroclass A1)
Point load (EN 12430)	: PL $\leq 1,5 \text{ mm}$
Compressive strength (EN 826 annexe A)	: CS $\geq 500 \text{ kPa}$
Bending strength (EN 12089)	: BS $\geq 400 \text{ kPa}$
Tensile strength (EN 1607)	: TR $\geq 150 \text{ kPa}$
Compressive creep (EN 1606)	: CC (1.5/1/50) 225

1) CE-marking ensures conformity with the mandatory essential requirements of CPD as mentioned in EN 13167; within the CEN Keymark certification all mentioned characteristics are certified by an empowered, notified and accredited 3rd party.

2. Additional product characteristics

Environmental Product Declaration : EPD-PCE-20150042-IBA1-DE
(ISO 14025 and EN 15804)

3. Applications

READY BLOCK TAPERED ROOF SYSTEM, cut-to-falls insulation system:

- flat roofs: bonding on concrete, metal deck and special roofs
- belowgrade: floors
- interior insulation: floors

Insulation system allowing for torch-on roofing.