




FOAMGLAS® READY TAPERED T4+

Page: 1 Date: 01.08.2021 Supersedes: 01.01.2021 www.foamglas.com

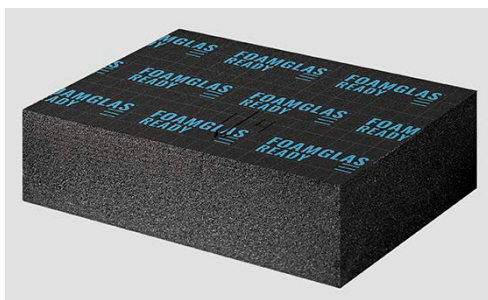

FOAMGLAS® READY TAPERED T4+ consists of FOAMGLAS® READY T4+ slabs which are tapered across their width, or sometimes their length. A central arrow stamped onto the top surface indicates the direction of fall.

The upper surface is coated with a bitumen layer and covered with a PE foil. This allows direct torch-on of waterproofing sheets.

Form of delivery

length x width [mm]	600 x 450							
average thickness [mm]	60	70	80	90	100	110	120	130

length x width [mm]	600 x 450							
average thickness [mm]	140	150	160	170	180	190	200	

Standard angles of inclination:




1.1%, 1.3%, 1.7%, 2.0%, 2.8%, 3.0%, 3.3%, 4.0%, 4.4%, 5.0%, 5.6%, 6.7%.

Other dimensions and thicknesses are available on request.

General FOAMGLAS® Cellular Glass Insulation characteristics

- Description : FOAMGLAS® Insulation is manufactured from specially graded recycled glass and natural raw materials which are available in abundant supply (sand, dolomite, lime...). The insulation is totally inorganic, contains no ozone depleting propellants, flame resistant additives or binders. Without VOC or other volatile substances.
- Reaction to fire (EN 13501-1) : Material complying with Euroclass A1, non-combustible, no toxic fumes
- Service temperature limits : from -265°C to +430°C
- Water vapour resistance (EN ISO 10456) : $\mu = \infty$
- Hygroscopicity : zero
- Capillarity : zero
- Melting point (cf DIN 4102-17) : >1000 °C
- Thermal expansion coefficient (EN 13471) : $9 \times 10^{-6} \text{ K}^{-1}$
- Specific heat (EN ISO 10456) : 1000 J/(kg·K)

FOAMGLAS® characteristics :

				
Time-tested thermal performance	Waterproof	Resistant to attack	High compressive strength	Acid resistant / chemical resistant
				
Non-combustible	Impervious to water vapour	Dimensionally stable	Ecological	Radon protection



FOAMGLAS® READY TAPERED T4+

Page: 2

Date: 01.08.2021

Supersedes: 01.01.2021

www.foamglas.com

1. Product characteristics according to EN 13167 ¹⁾ and ETA17/0903 ²⁾

Density ($\pm 15\%$) (EN 1602)	: 115 kg/m ³
Thickness (EN 823) ± 2 mm	: from 60 to 200 mm
Length (EN 822) ± 2 mm	: 600 mm
Width (EN 822) ± 2 mm	: 450 mm
Thermal conductivity (EN ISO 10456)	: $\lambda_D \leq 0,041$ W/(m·K)
Reaction to fire (EN 13501-1)	: Euroclass E (Core material Euroclass A1)
Point load (EN 12430)	: PL $\leq 1,5$ mm
Compressive strength (EN 826 annexe A)	: CS ≥ 600 kPa
Characteristic value of compressive stress (ISO 12491:1997) ³	: $\sigma_{0,05} = 633$ KPa (n=50, $\sigma_{\text{mean}} = 750$ kPa, $s_0 = 55$ kPa)
Bending strength (EN 12089)	: BS ≥ 450 kPa
Tensile strength (EN 1607)	: TR ≥ 150 kPa
Compressive creep (EN 1606)	: CC (1,5/1/50) 225

- 1) CE-marking ensures conformity with the mandatory essential requirements of CPR as mentioned in EN 13167; within the CEN Keymark certification all mentioned characteristics are certified by an empowered, notified and accredited 3rd party.
- 2) ETA-17/0903 in reference to EAD no. 040777-00-1201 for the intended use cellular glass boards as load bearing layer and thermal insulation outside the waterproofing.
- 3) Characteristic value of compressive stress or compressive strength, 5%-fractile value for a one-sided confidence level of 75 % under unknown or known variance using ISO 12491:1997.

2. Additional product characteristics

Thermal diffusivity at 0°C	: 4.2×10^{-7} m ² /sec
Flexural modulus of elasticity E	: 700 MN/m ²
BRE Green Guide Rating	: A
NBS plus	: yes
RIBA - CPD Assessed Material	: yes

3. Applications

READY BLOCK Tapered Insulation System

- Flat and Tapered Roofs
- Balconies
- Terraces
- Walkways
- Internal floors

READY BLOCK is cold bonded with PC® adhesive to substructures.

Membranes can be torched directly onto the upper surface of the READY BLOCK.