


Interior floor insulation on levelling compound with cement / anhydrite screed

FOAMGLAS® FLOOR BOARD in dry construction



Schematic drawing

System 3.1.3

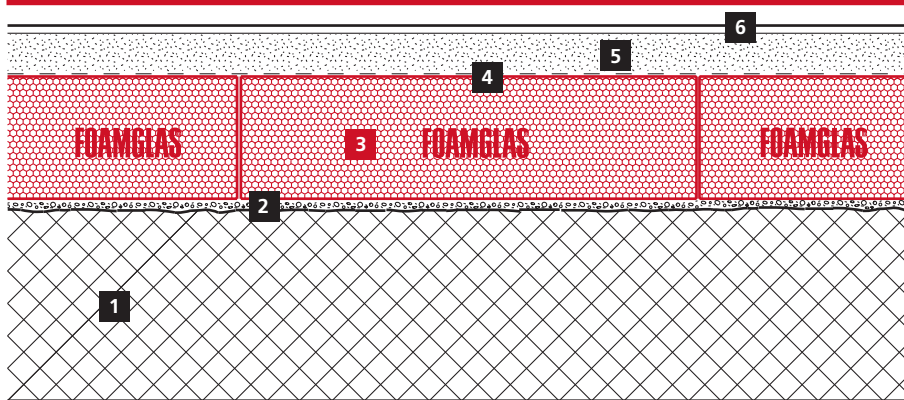

- 1 Concrete slab
- 2 Sand levelling layer or liquid mortar
- 3 FOAMGLAS® FLOOR BOARD, loosely laid
- 4 Separating layer
- 5 Cement / anhydrite screed
- 6 Floor finish

FOAMGLAS® product properties

Waterproof – Resistant to vermin – High compressive strength –
Non-combustible – Impervious to water vapour – Dimensionally stable –
Acid resistant – Easily cut to shape – Ecological


Advantages of the FOAMGLAS® system

- **Quality:** Systems with high quality materials. Quality management by systematic site inspections and professional consulting.
- **Cost efficiency:** The high durability preserves maximum value and guarantees minimal maintenance costs.
- **Sustainability:** Optimum insulation and protection against moisture for generations.
- **Safety:** Substrate with high compressive strength and free of deformation, preventing flaws and flooring damages. Cellular glass contains no toxic substances and, in case of fire, does not develop fumes or toxic gases.
- **Functionality:** Insulation and capillary barrier in one single functional layer.

Recommendations for architects

- Normally used: **FOAMGLAS® FLOOR BOARD T4+,S3 or F, size 600 / 1200 mm.**
- Insulation thickness to meet building regulations or the project-specific U-value requirements. Please also consult our product overview. It contains information on all our products, their field of application and their specific properties.
- For the use of FOAMGLAS® under load bearing conditions, the project/structural engineer must check the admissible loads.
- The flatness and the general conditions of the substrate are important criteria when using FOAMGLAS® (see TG1). Please contact our Technical Department to verify the criteria for the substrate.
- For a technically correct implementation, relevant standards and guidelines must be observed.

Solutions for technical details and specification clauses on request. Further proposals and solutions are available any time from our technical consultants. **Updated: 01/03/2021.** We explicitly reserve the right to change the technical specifications. The current values can be found on our website under: www.foamglas.ae



Interior floor insulation on levelling compound with cement / anhydrite screed

FOAMGLAS® FLOOR BOARD in dry construction




System 3.1.3

Installation instructions

- Apply a thin layer of sand or liquid mortar to level off irregularities. Smooth surface evenly. (1)
- FOAMGLAS® FLOOR BOARD with tight-butted and staggered joints. (2)
- Apply separating layer, joints overlapping. (3)
- Apply the cement or anhydrite screed, layer thickness dependent on heating system and load.

Recommendations for the contractor

- The build up and tolerances of the substrate must be in accordance with relevant standards and guidelines.
- Substrate and ambient temperature should not be below +5° C.
- **Please contact our technical consultants; they can help you by providing support or on-site assistance free of charge.**

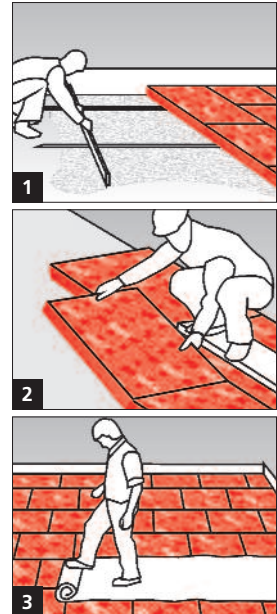

The technical guidelines for the application and the installation of FOAMGLAS® are based on historical experience and general site practice. They do not reflect individual examples. We therefore assume no liability as to the completeness and the suitability for a specific project. Furthermore, our liability and responsibility are subject to our general conditions of sale which are not extended either by this technical data sheet nor by the consulting of our technical sales representatives.

**Pittsburgh Corning Europe
(Rep. Middle East)**
P.O. Box 213345, Dubai U.A.E.
Phone +971 4 434 7141
Fax +971 4 432 7109
info@foamglas.ae
www.foamglas.ae