


Inverted roof with non-combustible insulation on a continuous support

FOAMGLAS® INVATHERM™ loose laid (one layer system)

Schematic drawing

System 4.8.5

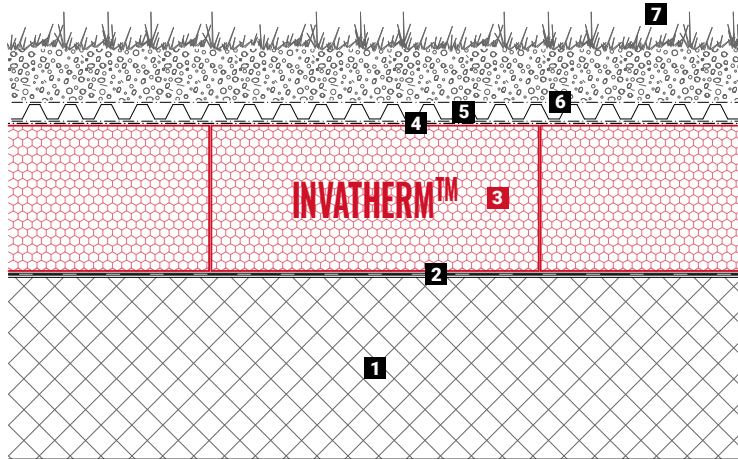

1. Concrete roof deck in compliance with BS 6229
2. Waterproofing membrane
3. FOAMGLAS® INVATHERM™
4. Water flow reducing layer (WFRL)
5. Reservoir / Drainage Board
6. Filter sheet
7. Extensive green roof system

Features and advantages of the FOAMGLAS® solutions


- **Combustibility:** Euroclass A1 FOAMGLAS® insulation products for inverted roof systems.
- **High Compressive Strength:** Tested to Annex A of EN826 with a compressive strength of 400* kPa without deformation – please see specific Product Data Sheets for further guidance.
- **Long Term Performance:** The durability of FOAMGLAS® insulation results in long-term dimensional stability and time-tested performance.
- **Quality:** The system is made of high-quality materials.
- **Safety:** FOAMGLAS® insulation contains no toxic substances and in the event of a fire, does not develop fumes or toxic gases, nor does it contribute to spread of fire.

*The application of a suitable factor of safety is recommended when undertaking structural assessment of product performance.

Recommendations for architect

FOAMGLAS® INVATHERM™ (600 x 450 mm)

- FOAMGLAS® INVATHERM™ is a non-combustible, non-toxic, Euroclass A1 insulation material.
- This inverted roof system can only be used on buildings where the internal temperature is always 8°C or more.
- This inverted roof system can also be used for zero fall roofs in compliance with BS 6229 with limited access, balconies and terraced roofs subject to pedestrian access only.
- All layers of the build-up have to be in accordance with the local regulations.
- Insulation thickness is to meet building regulations or the project specific U-value requirements.
- For further information regarding FOAMGLAS® products or any specific properties, please consult our PDS.
- FOAMGLAS® INVATHERM™ slabs should not be trimmed down on site to less than 150 x 150 mm.
- The tolerance and general conditions of the substrate are important criteria when using FOAMGLAS® INVATHERM™ (refer to document TG05 for further information). FOAMGLAS® Technical Department can be consulted for further guidance.
- For technically correct installation, relevant standards and guidelines must be observed.
- Negative back falls, which can lead to ponding, are not acceptable and should be corrected in compliance with BS 6229.
- Extensive green roofs are lightweight roofs covered with low-maintenance vegetation, such as succulents like sedums, herbs and grasses that are specially adapted to the extreme weather conditions on roofs.






Inverted roof with non-combustible insulation on a continuous support

FOAMGLAS® INVATHERM™ loose laid (one layer system)

System 4.8.5

Installation instructions

- The waterproofing membrane has to be installed on the substrate in accordance with the manufacturer's recommendations. [1]
- FOAMGLAS® INVATHERM™ must be continuously supported by a stable and levelled substrate. If this is not the case, the bottom side of the slab has to be trimmed and shaped, such that the FOAMGLAS® INVATHERM™ rests flat on the substrate. This is always required where the membrane overlaps. [2] For further information consult the TG05 Technical Guidelines.
- All joints between the FOAMGLAS® INVATHERM™ slabs must be tight and avoid gaps.
- Install FOAMGLAS® INVATHERM™ with staggered and tight-butted joints, following the TG05 Technical Guidelines. The referenced document provides full information for the handling of the FOAMGLAS® INVATHERM™, including measuring and cutting the insulation, avoiding open joints or gaps; and optimising the layout to avoid cutting to less than 150 mm width. [3]
- Lay the Water Flow Reducing Layer over the FOAMGLAS® INVATHERM™, in accordance with the manufacturer's instructions (loosely laid). [4]
- To achieve the U-value performance, the Water Flow Reducing Layer must be specified and installed following the manufacturer's instructions and any relevant local regulation.
- Apply the reservoir / drainage board and the filter sheet, in accordance with the manufacturer's instructions (loose laid). [5]
- Apply the extensive green roof system in accordance with the manufacturer's instructions.



Recommendations for the contractor

- The build up and tolerances of the substrate have to be in accordance with relevant standards and guidelines.
- FOAMGLAS® INVATHERM™ is a non-combustible, non-toxic, Euroclass A1 insulation material.
- Safety Data Sheets (SDS) and labels must be read before starting the works on site. The Contractor shall be responsible for all necessary health and safety precautions.
- The system build-up and tolerances of the substrate have to be in accordance with relevant standards and guidelines for the FOAMGLAS® INVATHERM™.
- The flatness and the general conditions of the substrate are important criteria when using FOAMGLAS® INVATHERM™ (refer to document TG05 document for further information).
- Site conditions shall be considered, including suitability of ambient and surface temperatures, as per manufacturer's instructions.
- FOAMGLAS® INVATHERM™ should not be trimmed to less than 150 mm width to ensure a robust installation.
- Staggered joints need to be placed with a minimum of 150 mm from each other to ensure a good performance. The protection layer and ballast should be installed immediately, upon installation of FOAMGLAS® INVATHERM™, to prevent accidental damage to the material.
- Adequate measures shall be taken in order to avoid any risks of damage to the materials during construction. Point loads need to be avoided on the top surface of the FOAMGLAS® INVATHERM™, make sure to take adequate measures when walking and working on the surface.
- Minor damages on the FOAMGLAS® INVATHERM™ can be repaired with our PC® SKYFIX A2.
- Major damages to the FOAMGLAS® INVATHERM™ must be replaced. Technical Support and on-site assistance can be provided upon request.

Building internal temperature

The FOAMGLAS® INVATHERM™ inverted roof insulation system is designed for use upon buildings with an internal temperature of minimum 8°C.

The information contained in this Technical Data Sheet is accurate and reliable to the best of our knowledge as of its date issued and is subject to change without prior notice. No guarantee of accuracy is given or implied. This document supersedes and replaces all information supplied prior to the publication hereof. The provision of this information should not be construed as a recommendation to use any of our products, nor to use any of our products in violation of any patent rights or in breach of any statute or regulation. Since FOAMGLAS® business has no control over installation workmanship, accessory materials or conditions of application, no express or implied warranty of any kind, including those of merchantability or fitness for a particular purpose or course of performance or usage of trade, is made as to the performance of an installation containing FOAMGLAS® products. User is solely responsible for determining whether a FOAMGLAS® product is fit for a particular purpose and suitable for user's method of use or application. Given the variety of factors that can affect the use and application of a FOAMGLAS® product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluates the FOAMGLAS® product to determine whether it is fit for a particular purpose and suitable for user's method of use or application. Liability of FOAMGLAS® business, if any, is strictly limited to replacement of product. In no event shall FOAMGLAS® business be liable for any other damages arising because of product failure, whether incidental, special, consequential or punitive, regardless of the theory of liability upon which any such damages are claimed. FOAMGLAS® business provides written warranties for many of its products, and such warranties take precedence over the statements contained herein. Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance.

© 2025 Owens Corning. All Rights Reserved.

Owens Corning Insulation (UK) Ltd.
31-35 Kirby Street
London, EC1N 8TE
technical@foamglas.co.uk