




FOAMGLAS® READY TAPERED S3

Page: 1 Date: 01.01.2019 Supersedes: 00.00.0000 www.foamglas.com

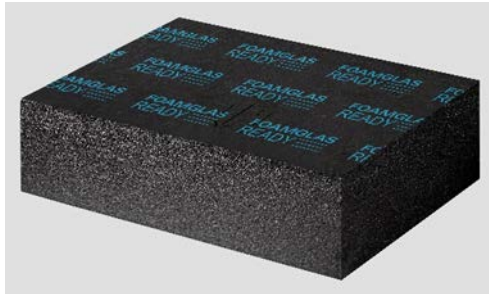

FOAMGLAS® READY TAPERED S3 consists of FOAMGLAS® READY S3 slabs which are tapered across their width, or sometimes their length. A central arrow stamped onto the top surface indicates the direction of fall.

The upper surface is covered with a bitumen coating. It allows for direct torch-on of waterproofing sheets.

Form of delivery

length x width [mm]	600 x 450							
average thickness [mm]	60	70	80	90	100	110	120	130
length x width [mm]	600 x 450							
average thickness [mm]	140	150	160	170	180	190	200	

Standard angles of inclination:
 1.1%, 1.3%, 1.7%, 2.0%, 2.8%, 3.0%, 3.3%, 4.0%, 4.4%, 5.0%, 5.6%, 6.7%.
 Other dimensions and thicknesses are available on request.

General FOAMGLAS® Cellular Glass Insulation characteristics

- Description : FOAMGLAS® Insulation is manufactured from specially graded recycled glass (≥ 60%) and natural raw materials which are available in abundant supply (sand, dolomite, lime...). The insulation is totally inorganic, contains no ozone depleting propellants, flame resistant additives or binders. Without VOC or other volatile substances.
- Reaction to fire (EN 13501-1) : Material complying with Euroclass A1, non-combustible, no toxic fumes
- Service temperature limits : from -265°C to +430°C
- Water vapour resistance (EN ISO 10456) : $\mu = \infty$
- Hygroscopicity : zero
- Capillarity : zero
- Melting point (cf DIN 4102-17) : >1000 °C
- Thermal expansion coefficient (EN 13471) : $9 \times 10^{-6} \text{ K}^{-1}$
- Specific heat (EN ISO 10456) : 1000 J/(kg·K)

FOAMGLAS® characteristics

Time-tested thermal performance	Waterproof	Resistant to attack	High compressive strength	Acid resistant / chemical resistant
Non-combustible	Impervious to water vapour	Dimensionally stable	Ecological	Radon protection



FOAMGLAS® READY TAPERED S3

Page: 2

Date: 01.01.2019

Supersedes: 00.00.0000

www.foamglas.com

1. Product characteristics according to EN 13167 ¹⁾

Density (± 10%) (EN 1602)	: 130 kg/m ³
Thickness, average (EN 823) ± 2 mm	: from 60 to 200 mm
Length (EN 822) ± 2 mm	: 600 mm
Width (EN 822) ± 2 mm	: 450 mm
Thermal conductivity (EN ISO 10456)	: $\lambda_D \leq 0.045 \text{ W/(m}\cdot\text{K)}$
Reaction to fire (EN 13501-1)	: Euroclass E (Core material Euroclass A1)
Point load (EN 12430)	: PL $\leq 1.0 \text{ mm}$
Compressive strength (EN 826 annexe A)	: CS $\geq 900 \text{ kPa}$
Bending strength (EN 12089)	: BS $\geq 500 \text{ kPa}$
Tensile strength (EN 1607)	: TR $\geq 200 \text{ kPa}$

1) CE-marking ensures conformity with the mandatory essential requirements of CPD as mentioned in EN 13167; within the CEN Keymark certification all mentioned characteristics are certified by an empowered, notified and accredited 3rd party.

2. Additional product data

Thermal diffusivity at 0°C	: $4.1 \times 10^{-7} \text{ m}^2/\text{sec}$
λ_D -value and mean t° range (EN ISO 13787)	: + 35 °C $\leq 0.049 \text{ W/(m}\cdot\text{K)}$
Product Conformity BS EN 13167 : 2001	: Nr. CL 07020029
BRE Green Guide Rating	: A
NBS plus	: yes
RIBA - CPD Assessed Material	: yes

3. Applications

READY BLOCK TAPERED ROOF SYSTEM, cut-to-falls insulation system:

- flat roofs (cold bonding on concrete using PC® 500)
- metal and special roofs
- belowgrade floors and walls
- interior insulation for floors

Insulation system allowing for direct torch-on of waterproofing sheets.